

# Tests of multimode quantum non-locality using homodyne measurements

Antonio Acín,<sup>1</sup> Nicolas J. Cerf,<sup>2</sup> Alessandro Ferraro,<sup>1</sup> and Julien Niset<sup>2</sup>

<sup>1</sup>*ICFO-Institut de Ciències Fòniques, Mediterranean Technology Park, 08860 Castelldefels (Barcelona), Spain*

<sup>2</sup>*QuIC, Ecole Polytechnique, CP 165, Université Libre de Bruxelles, 1050 Brussels, Belgium*

(Dated: August 18, 2008)

We investigate the violation of local realism in Bell tests involving homodyne measurements performed on multipartite continuous-variable states. By binning the measurement outcomes in an appropriate way, we prove that the Mermin-Klyshko inequality can be violated by an amount that grows exponentially with the number of modes. Interestingly, the maximum violation allowed by quantum mechanics can be attained for any number of modes, albeit with a quantum state that is rather unrealistic. Furthermore, this exponential increase of the violation holds true even for simpler states, such as multipartite GHZ states. The resulting benefit of using more modes is shown to be significant in practice by analyzing the increase of the robustness to noise of the multipartite Bell test with the number of modes. In view of the high efficiency achievable with homodyne detection, our results thus open a possible way to feasible loophole-free tests of nonlocality that are robust to experimental imperfections. We provide an explicit example of a three-mode state (a superposition of coherent states) which results in a significantly high violation of the Mermin-Klyshko inequality (around 10%) with homodyne measurements.

## I. INTRODUCTION

The non-local nature of quantum mechanics is arguably one of its most counterintuitive aspects, marking a fundamental departure from the classical picture of physical systems. First recognized by Einstein, Podolsky, and Rosen [1], the intrinsic non-locality of the quantum theory was put into a testable form via the celebrated Bell inequalities [2]. Since the first experimental violation of a Bell inequality [3], a great variety of tests have been performed. In all of them, a local realistic model of the experimental results is shown to be incompatible with the actual observations. Nonetheless, a fully conclusive evidence for rejecting local realism has not been achieved yet. Indeed, all the experiments performed so far suffer from loopholes, which force us to rely on supplementary assumptions in order to reject local realism. Specifically, a conclusive experiment should close two main loopholes: the locality loophole (namely, the measured correlations must be collected with spacelike separated events) and the detection-efficiency loophole (namely, the proportion between detected and undetected events has to be high enough to be fully representative of the whole ensemble without the need to assume a “fair sampling”).

There is a large variety of quantum systems for which a test of local realism may be envisaged. However, the quest for a loophole-free Bell test has recently focused the research towards experiments involving propagating light modes measured with homodyne detectors [4, 5, 6, 7]. The advantage of such a “continuous-variable” approach is twofold. First, light modes can be easily sent to spacelike separated detectors suffering only a tolerable degree of decoherence. Second, the current technology of homodyne detectors achieves a degree of detection efficiency high enough to potentially close the detection efficiency loophole. On the other hand, such an approach involves also drawbacks whose resolution is still challenging. The main issue comes from the fact that the results of ho-

modyne measurements can be described by means of the Wigner function. Thus, in order to avoid a local hidden variable description of the measured correlations, one should necessarily perform the test with a state endowed with a non-positive Wigner function (otherwise, the Wigner function is a genuine probability distribution, which provides an explicit local realistic model of the data). Even if single-mode states of travelling light have already been generated with a non-positive Wigner function [8, 9], such (non-Gaussian) states are hard to master in the laboratory. Among the above mentioned proposals of Bell tests with homodyne detection, those nearer to an experimental realization only give a small violation of Bell inequalities [6, 7], whereas higher violations involve states whose actual generation seems rather unrealistic [5]. In this context, the search for Bell tests involving feasible resources and giving, at the same time, violations that are high enough to be robust against experimental noise is very desirable. This is the thrust of the present paper.

Bell tests relying on homodyne detection typically involve the following scenario. Two parties perform spacelike separated homodyne measurements by randomly choosing between two settings, thus measuring two quadratures of the incoming electromagnetic fields. The violation of the Bell Clauser-Horne-Shimony-Holt (CHSH) inequality [10] is then tested. Since this inequality is devised for two-outcome measurements, the collected data, which are distributed in a (approximately) continuous range, have to be discretized; such a procedure is referred to as binning process. In this work, we will generalize this scenario to more than two parties, considering the Mermin-Klyshko (MK) type of Bell inequalities, which involves  $m$  parties, two measurement settings, and two outcomes [11]. The main reason for this is that higher violations of local realism are expected as the number of parties increases [12], which may help in the search for feasible proposals of loophole-free Bell

tests able to tolerate the experimental noise.

The earlier investigations of Bell tests in infinite-dimensional spaces with multipartite settings have considered several scenarios. In Ref. [13], a test based on the measurement of the light field parity was envisaged. It was found that the violation does not increase exponentially, as one would have expected, but this may be due to the fact that no optimization over the possible measurement settings was performed [14]. In Ref. [15] instead, a maximal violation of Mermin-Klyshko inequality was found for continuous variable states, considering the measurement of a different class of operators which can be seen as the continuous-variable analogue of the spin operators. However, both these approaches deal with non-Gaussian measurements described by a non-positive Wigner function, which are far from the reach of current detection technology. Recently, a new approach has been introduced which does not rely on the use of inequalities for discrete outcomes, thus avoiding the need of a binning procedure [16]. There, quadrature measurements via homodyne detection are considered, and the measurement outcomes are used to directly test a novel Bell inequality for continuous variables. Interestingly, the authors find that the violation of the local realistic bound is exponential in the number of parties. However, a possible experimental implementation is still very challenging as it would require at least ten space-like separated homodyne measurements. It is then unclear whether such a novel approach can give advantages, from a practical perspective, over non-locality tests involving binning strategies.

In this paper, we will stick with the use of discrete-variable Bell inequalities in tests of non-locality for continuous-variable states, thus using some binning procedure. We will address the following question: Is it possible to have an exponential increase of the violation of local realism in a test involving quadrature measurements of  $m$  modes and considering the Mermin-Klyshko inequalities? We will answer this question by the affirmative, providing specific examples of states exhibiting such a behavior. These states belong to the class of photon-number correlated states, and generalize to any number of modes  $m$  the approach of Ref. [4]. Remarkably, we will show that it is even possible to obtain the maximal violation of Mermin-Klyshko inequalities by properly choosing the binning procedure and the quantum state, thus extending the results obtained for two modes in Ref. [5].

The theoretical interest of our results resides in the fact that we are not considering a direct mapping from continuous- to discrete-variable states. Thus, the possibility to obtain a maximal violation of Mermin-Klyshko inequality for any number of parties is *a priori* non-trivial. Furthermore, we may have anticipated that the binning procedure causes an irreparable loss of information, preventing the possibility of reaching a maximum violation. From an experimental perspective, our findings are that, in homodyne-measurement based Bell tests, various strategies allow for an increase of the violation of locality. This, in turn, gives specific insight and

allows for a greater freedom in the search of multipartite states for an actual experiment.

The paper is organized as follows. In Sec. II, we analyze a Bell test involving multimode states with perfect correlations in the number of photons in all modes. We analytically show that the violation of local realism can grow exponentially with the number of modes involved. This is true despite the fact that a simple sign binning strategy is used. Nonetheless, we see that, in these cases, the obtained violation does not reach the maximum value achievable within quantum mechanics. Furthermore, we show in Sec. III that a different binning strategy, properly tailored for some specific states, allows attaining the maximal violation of locality achievable within quantum mechanics. Then, in Sec. IV, we address the robustness of these nonlocality tests. We see that, at least for the analyzed noise model, the tolerable noise increases with the number of modes, making the violation better testable in practice. In Sec. V, we exploit all these results from a practically oriented perspective. In particular, we give an explicit example of a class of states which, on the one hand, exhibit a gain in the violation by considering more than two modes, and, on the other hand, may be implemented with the near future technology. Finally, we close the paper in Sec. VI with some concluding remarks.

## II. CORRELATED PHOTON NUMBER STATES

We show in this Section that in order to obtain an exponential violation of local realism with quadrature measurements, it is possible to rely on a simple binning strategy and the standard Mermin-Klyshko Bell inequalities. In achieving this goal we generalize to  $m$  parties the work in Ref. [4], where the bipartite scenario was analyzed.

Before proceeding, let us recall the general form of the Mermin-Klyshko Bell inequalities. Consider two dichotomic observables  $O_t$  and  $O'_t$  for each party  $t$ . The Mermin-Klyshko inequalities are based on the recursive definition of the Bell operator

$$B_t \equiv \frac{B_{t-1}}{2} \otimes (O_t + O'_t) + \frac{B'_{t-1}}{2} \otimes (O_t - O'_t), \quad (1)$$

where  $B_1 = 2O_1$ ,  $B'_1 = 2O'_1$ , and  $B'_t$  denotes the same expression as  $B_t$  but with all  $O_t$ 's and  $O'_t$ 's exchanged [12]. The Mermin-Klyshko inequality for  $m$  parties then reads

$$\mathcal{B}_m \equiv |\langle B_m \rangle| \leq 2. \quad (2)$$

In the case of two parties ( $m = 2$ ), this expression reduces to the well known CHSH inequality, for which

$$B_2 = O_1 \otimes O_2 + O_1 \otimes O'_2 + O'_1 \otimes O_2 - O'_1 \otimes O'_2 \quad (3)$$

Let us now consider a generic photon number correlated state of  $m$  bosonic modes

$$|\Psi\rangle = \sum_{r=0}^{\infty} c_r |r\rangle_1 |r\rangle_2 \dots |r\rangle_m, \quad (4)$$

with  $\sum_r |c_r|^2 = 1$ . The two observables  $O_t$  and  $O'_t$  to be measured are chosen as the two quadratures of the electromagnetic field  $X(\theta_t)$  and  $X(\theta'_t)$  (corresponding to angles  $\theta$  and  $\theta'$ ). These can be measured by applying an homodyne detection on each mode  $t$ . In the following, we use the notation  $X_t$  for the quadrature  $X(\theta_t)$ , and  $x_t$  for the outcome of its measurement (and similarly for primed quantities).

The joint probability to obtain the outcomes  $x_1, \dots, x_m$  when measuring the quadratures  $X_1, \dots, X_m$  is given by

$$\mathcal{P}(x_1, \dots, x_m) = |\langle x_1 | \dots | x_m | \Psi \rangle|^2 = \sum_{r,s=0}^{\infty} c_r c_s^* \times \frac{e^{i\phi(r-s)}}{(\pi 2^{r+s} r! s!)^{m/2}} \prod_{t=1}^m e^{-x_t^2} H_r(x_t) H_s(x_t), \quad (5)$$

where  $\phi = \theta_1 + \dots + \theta_m$ ,  $H_t(x)$  is the Hermite polynomial of degree  $t$ , and  $|x_t\rangle$  are the eigenvectors of the quadrature operator  $X_t$ .

Consider the following simple binning strategy, known as *sign binning*: when the result of a quadrature measurement falls in the domain  $\mathbb{R}^\pm$  the value  $\pm 1$  is associated to it. Now, let us start by calculating the probability  $\mathcal{P}_{+1, \dots, +1}$  that a “+1” result is observed in all the measuring sites:

$$\begin{aligned} \mathcal{P}_{+1, \dots, +1} &= \int_0^\infty dx_1 \cdots \int_0^\infty dx_m \mathcal{P}(x_1, \dots, x_m) \\ &= \sum_{r,s=0}^{\infty} c_r c_s^* \frac{e^{i\phi(r-s)}}{(\pi 2^{r+s} r! s!)^{m/2}} \\ &\quad \times \prod_{t=1}^m \int_0^\infty dx_t e^{-x_t^2} H_r(x_t) H_s(x_t). \end{aligned} \quad (6)$$

The integrals above can be evaluated by recalling the following properties of Hermite polynomials for  $r \neq s$ ,

$$\int_0^\infty dx e^{-x^2} H_r(x) H_s(x) = \frac{\pi 2^{r+s}}{r-s} [F(r, s) - F(s, r)], \quad (7)$$

where we defined  $F(r, s)$  as

$$F(r, s)^{-1} = \Gamma\left(\frac{1}{2} - \frac{1}{2}r\right) \Gamma\left(-\frac{1}{2}s\right), \quad (8)$$

with  $\Gamma$  being the Gamma function. For  $r = s$ , one has instead

$$\int_0^\infty dx e^{-x^2} H_r^2(x) = 2^{r-1} r! \sqrt{\pi}, \quad (9)$$

Defining the functions

$$\begin{aligned} \mathcal{G}(\phi, m) &= 2 \sum_{r>s} \text{Re}(c_r c_s^*) g_{r,s}(\phi, m), \\ g_{r,s}(\phi, m) &= \left(\frac{\pi 2^{r+s}}{r! s!}\right)^{m/2} \left[\frac{F(r, s) - F(s, r)}{r-s}\right]^m \\ &\quad \times \cos[\phi(r-s)], \end{aligned} \quad (10)$$

one obtains that

$$\mathcal{P}_{+1, \dots, +1} = \frac{1}{2^m} + \mathcal{G}(\phi, m). \quad (11)$$

The other probabilities can be obtained in a similar way. Let us define the multi-index  $\mathbf{d} = (d_1, \dots, d_m)$ , with  $d_t = \pm 1$  denoting the measurement outcome obtained for mode  $t$  after binning. Then, the joint probability for a generic collection  $\mathbf{d}$  of measurement outcomes will be indicated by  $\mathcal{P}_{\mathbf{d}}$ . It can be obtained similarly as  $\mathcal{P}_{+1, \dots, +1}$  by recalling that an Hermite polynomial of even (odd) degree is an even (odd) function, namely

$$\mathcal{P}_{\mathbf{d}} = \frac{1}{2^m} + \sigma(\mathbf{d}) \mathcal{G}(\phi, m), \quad (12)$$

where  $\sigma(\mathbf{d}) = \prod_{t=1}^m d_t$ . Now, we are in the position to calculate the generic correlation function between the measurement results  $E(\phi, m)$  (note that it only depends on the sum of the angles  $\phi$ ). By definition, we have

$$E(\phi, m) = \sum_{\mathbf{d}} \sigma(\mathbf{d}) \mathcal{P}_{\mathbf{d}}, \quad (13)$$

where the sum goes over all possible collections  $\mathbf{d}$  of measurement outcomes. Since the number of possible collections for which  $\sigma(\mathbf{d}) = 1$  is equal to that for which  $\sigma(\mathbf{d}) = -1$ , one finally has, by substituting Eq. (12) into Eq. (13), that

$$E(\phi, m) = 2^m \mathcal{G}(\phi, m). \quad (14)$$

Let us show that we can reach an exponential violation with a simple analytical manageable example. For the simple case of three parties ( $m = 3$ ), the Mermin-Klyshko inequality then reads  $\mathcal{B}_3 \equiv |\langle B_3 \rangle| \leq 2$ , with

$$\begin{aligned} B_3 &= O_1 \otimes O_2 \otimes O'_3 + O_1 \otimes O'_2 \otimes O_3 + O'_1 \otimes O_2 \otimes O_3 \\ &\quad - O'_1 \otimes O'_2 \otimes O'_3 \end{aligned} \quad (15)$$

Considering a tripartite GHZ state,

$$|\text{GHZ}_3\rangle = \frac{1}{\sqrt{2}}(|000\rangle + |111\rangle), \quad (16)$$

we have  $c_0 = c_1 = 2^{-1/2}$  and  $c_{r \geq 2} = 0$ , so that  $\mathcal{G}(\phi, 3) = g_{1,0}(\phi, 3) = (2\pi)^{-3/2} \cos(\phi)$  and Eq. (14) becomes

$$E(\phi, 3) = 2^3 \mathcal{G}(\phi, 3) = (2/\pi)^{3/2} \cos(\phi). \quad (17)$$

The GHZ-like angles ( $\theta_1 = 0$ ,  $\theta_2 = \pi/6$ ,  $\theta_3 = 2\pi/6$ , and  $\theta'_i = \theta_i + \pi/2$ ), give the maximum violation of the inequality, namely

$$\mathcal{B}_3 = |3E(\pi, 3) - E(0, 3)| = 4 \left(\frac{2}{\pi}\right)^{3/2} \simeq 2.032. \quad (18)$$

Now, consider the multipartite generalization of the GHZ state

$$|\text{GHZ}_m\rangle = \frac{1}{\sqrt{2}}(|0\dots 0\rangle + |1\dots 1\rangle), \quad (19)$$

Eq. (14) becomes

$$E(\phi, m) = \left(\frac{2}{\pi}\right)^{m/2} \cos \phi. \quad (20)$$

The dependence on the angle  $\phi$  of the above correlations is the same as the one appearing in a standard spin-like test for a multipartite GHZ state, namely  $E(\phi, m) = \cos(\phi)$ . In that case, it is known that the choice of GHZ-like angles  $\theta_k = (-1)^{m+1}\pi(k-1)/(2m)$  and  $\theta'_k = \theta_k + \pi/2$ , gives the highest value of the Bell factor, namely  $2^{(m+1)/2}$  (see e.g. Ref. [12]). Therefore, using the same angles, the corresponding Bell factor reads

$$\mathcal{B}_m = \sqrt{2} \left(\frac{4}{\pi}\right)^{m/2}, \quad (21)$$

giving rise to an exponential violation of local realism.

Apart from this simple analytical example, one can use a numerical approach to show the exponential violation of local realism as the formula (14) is easily amenable to perform numerical calculations for a fixed number of parties  $m$ . In order to find the state  $|\Psi\rangle$  (coefficients  $c_r$ 's) that maximally violates the Mermin-Klyshko inequality, one has to evaluate the corresponding Bell factor  $B_m$  for a given configuration of measuring angles. The Bell factors are expressed in general by a linear combination of correlation functions given each by Eq. (14), with the prescription given in Eq. (1).

Let us search the state which maximizes the violation of the Mermin-Klyshko inequality for the particular GHZ-like choice of angles. For three modes ( $m = 3$ ), defining the (infinite dimensional) real symmetric matrix  $B_3$  as

$$[B_3]_{r,s} = 2^3 (3g_{r,s}(\pi, 3) - g_{r,s}(0, 3)), \quad (22)$$

where the diagonal elements are set to zero, we note that the Bell factor can be re-expressed as  $\mathcal{B}_3 = C^\dagger B_3 C$ , where the elements of the vector  $C$  are given by the coefficients of the input state, *i.e.*  $[C]_r = c_r$ . Consequently, the maximal violation of the Mermin-Klyshko inequality is simply given by the maximal eigenvalue of the matrix  $B_3$ , while the optimal input state is determined by its corresponding eigenvector. In order to perform a numerical analysis, one has to truncate the Hilbert space dimension of  $|\Psi\rangle$  to some arbitrary  $d$ . For example, for  $d = 2$  the optimal choice turns out to be the GHZ state (16), giving a violation of  $\mathcal{B}_3 = 2.032$ . By increasing the dimension  $d$ , the asymptotic violation is given by  $\mathcal{B}_3 \simeq 2.205$ . In Fig. 1, we show the coefficients  $c_r$  for the optimal state  $|\Psi\rangle$  in the case  $d = 20$ , for which the Bell factor is  $\mathcal{B}_3 \simeq 2.204$ .

The same procedure can be applied for any number of parties. In the case of two parties ( $m = 2$ ), one recovers the results given by Munro in Ref. [4] provided that the constraint  $c_r > 0$  is taken into account, namely  $\mathcal{B}_2 \simeq 2.076$ . Interestingly, a higher violation can be achieved if we consider negative coefficients for  $|\Psi\rangle$ . As an example,

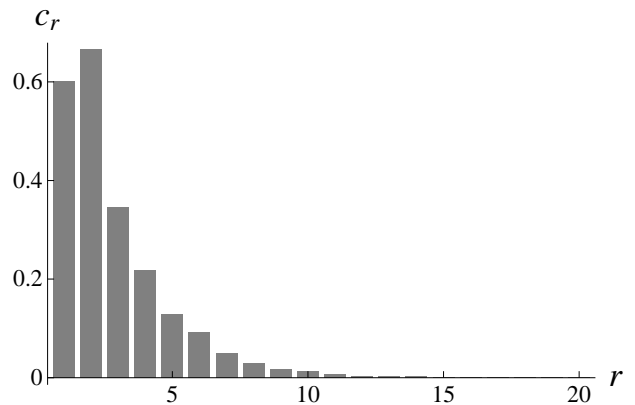


FIG. 1: Coefficients  $c_r$  for the optimal state  $|\Psi\rangle$  in the case of  $m = 3$ ,  $d = 20$  (with GHZ-like measurement angles). The Bell factor is  $\mathcal{B}_3 \simeq 2.204$ .

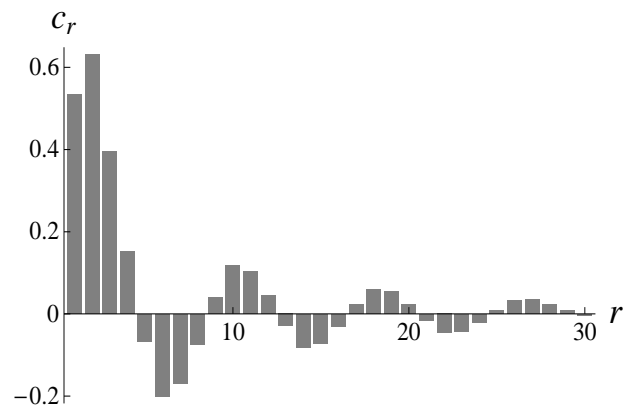


FIG. 2: Coefficients  $c_r$  for the optimal state  $|\Psi\rangle$  in the case of  $m = 2$ ,  $d = 30$ . The Bell factor is  $\mathcal{B}_2 \simeq 2.1$ .

we report in Fig. 2 the coefficients  $c_r$  for the optimal state in the case  $d = 30$ , for which the Bell factor raises up to  $\mathcal{B}_2 \simeq 2.100$  (recall that the Bell factor can be written in this case as  $\mathcal{B}_2 = 3E(\phi, 2) - E(3\phi, 2)$ , where we have chosen  $\phi = \pi/4$ , as in [4]).

### III. MAXIMAL VIOLATION

Let us now see if we can find a class of states and a binning strategy that allows for a maximal violation of the Mermin-Klyshko inequality for any number of parties  $m$  and using quadrature measurements. We recall that the maximal quantum violation of these inequalities is given by  $\mathcal{B}_m^{max} = 2^{(m+1)/2}$  [12]. Inspired by the results of Ref. [5], we introduce the state

$$|\Psi\rangle = \frac{1}{\sqrt{2}}(|f\rangle^{\otimes m} + e^{i\theta}|g\rangle^{\otimes m}), \quad (23)$$

where  $f$  is a real and even function of some quadrature  $x$ , while  $g$  is real and odd (thus,  $f$  and  $g$  are orthogonal). Both functions are also normalized to unity. Note

that because  $f(x)$  is real and even, it has a real and even Fourier transform  $\tilde{f}(p)$ , while  $g(x)$  has an imaginary Fourier transform  $i\tilde{h}(p)$ , with  $\tilde{h}(p)$  real and odd.

Each party  $t$  chooses to measure one of two conjugated quadrature via homodyne detection, either  $X(0) = X$  or  $X(\pi/2) = P$ , and obtains a continuous variable  $x_t$  or  $p_t$  depending on the choice of measurement setting. Suppose the  $k$  first parties measure the  $X$  quadrature, while the remaining  $m - k$  measure the conjugate quadrature  $P$ . The joint probability that they obtain the results  $x_1, \dots, x_k, p_{k+1}, \dots, p_m$  is given by

$$\begin{aligned} \mathcal{P}(x_1, \dots, x_k, p_{k+1}, \dots, p_m) &= |\langle x_1 | \dots \langle x_k | \langle p_{k+1} | \dots \langle p_m | \Psi \rangle|^2 \\ &= \frac{1}{2} (f^2(x_1) \dots f^2(x_k) \tilde{f}^2(p_{k+1}) \dots \tilde{f}^2(p_m) \\ &\quad + g^2(x_1) \dots g^2(x_k) \tilde{h}^2(p_{k+1}) \dots \tilde{h}^2(p_m) \\ &\quad + 2 \cos(\theta + (m - k) \frac{\pi}{2}) \times f(x_1) g(x_1) \dots f(x_k) g(x_k) \\ &\quad \times \tilde{f}(p_{k+1}) \tilde{h}(p_{k+1}) \dots \tilde{f}(p_m) \tilde{h}(p_m)). \end{aligned} \quad (24)$$

To exploit the parity properties of  $f$  and  $g$ , we introduce the root binning defined in Ref. [5]. This binning depends on the roots of the known functions  $f$  and  $g$ . If party  $t$  measures the  $X$  quadrature, the result will be interpreted as a “+1” if the measured value  $x_t$  lies in the interval where  $f(x_t)$  and  $g(x_t)$  have the same sign, and “-1” if their signs are opposite, i.e. we consider the following domains

$$\begin{aligned} D_x^+ &= \{x \in \mathbb{R} | f(x)g(x) \geq 0\} \\ D_x^- &= \{x \in \mathbb{R} | f(x)g(x) < 0\}. \end{aligned} \quad (25)$$

We can similarly define the domains  $D_p^+$  and  $D_p^-$  associated to the measurement of the quadrature  $P$ . For the choice of measurement settings defined above, we can thus calculate  $2^m$  probability  $\mathcal{P}_{\mathbf{d}}$  corresponding to the observation of a given collection  $\mathbf{d}$  of binary results. For example, the probability  $\mathcal{P}_{+1, \dots, +1}$  that each party observes a “+1” result reads

$$\begin{aligned} \mathcal{P}_{+1, \dots, +1} &= \int_{D_x^+} dx_1 \dots \int_{D_x^+} dx_k \int_{D_p^+} dp_{k+1} \dots \int_{D_p^+} dp_m \\ &\quad \times \mathcal{P}(x_1, \dots, x_k, p_{k+1}, \dots, p_m). \end{aligned} \quad (26)$$

We are now in the position to calculate the correlation function  $E(X_1, \dots, X_k, P_{k+1}, \dots, P_m)$ . Note that since  $f$  and  $g$  ( $\tilde{f}$  and  $\tilde{h}$ ) are even and odd respectively,  $f^2$  and  $g^2$  ( $\tilde{f}^2$  and  $\tilde{h}^2$ ) are even functions. Hence the first two terms of the right hand side of (24) are even functions also, and their contribution to the correlation function will vanish. We thus obtain the remarkably simple expression

$$\begin{aligned} E(X_1, \dots, X_k, P_{k+1}, \dots, P_m) &= V^k W^{m-k} \\ &\quad \times \cos \left[ \theta + (m - k) \frac{\pi}{2} \right] \end{aligned} \quad (27)$$

where

$$\begin{aligned} V &= \int_{-\infty}^{\infty} dx |f(x)g(x)| \\ W &= \int_{-\infty}^{\infty} dp |\tilde{f}(p)\tilde{h}(p)| \end{aligned} \quad (28)$$

Interestingly, the correlation function (27) only depends on the number of sites where  $X$  and  $P$  are measured. All correlation functions corresponding to  $k$  measurements of the  $X$  quadrature, and  $m - k$  measurements of the  $P$  quadrature are therefore equal. We will denote them  $E(k, m - k)$  to emphasize this property.

Let us illustrate the power of this compact notation with an example. For  $m = 3$ , the Bell factor reads

$$\begin{aligned} \mathcal{B}_3 &= |E(X_1, X_2, P_3) + E(P_1, X_2, X_3) + E(X_1, P_2, X_3) \\ &\quad - E(P_1, P_2, P_3)| \\ &= |3E(2, 1) - E(0, 3)| \\ &= |3V^2W \cos(\theta + \frac{\pi}{2}) - W^3 \cos(\theta + 3\frac{\pi}{2})| \end{aligned} \quad (29)$$

We see that the maximal violation, i.e.  $\mathcal{B}_3^{max} = 4$ , can be reached with a state  $|\Psi\rangle$  such that  $\sin(\theta) = \pm 1$  and  $V = W = 1$ . Although such a state is quite unrealistic, one can define a family of physical states that approximates it arbitrarily well. The corresponding  $f$  and  $g$  functions are trains of gaussians, and  $V, W \rightarrow 1$  as the number of peaks goes to infinity. We refer the reader to Ref. [5] for their exact analytical expression.

Let us now generalize this result for an arbitrary  $m$ . First note that the Bell factor (2) can be written as

$$\begin{aligned} \mathcal{B}_m &= \frac{1}{2} |\langle X_m B_{m-1} \rangle + \langle P_m B_{m-1} \rangle + \langle X_m B'_{m-1} \rangle \\ &\quad - \langle P_m B'_{m-1} \rangle| \end{aligned} \quad (30)$$

with  $B_1 = 2X_1$  and  $B'_1 = 2P_1$ . In order to benefit from our compact notation, we explicitly expand the expectation values of  $B_{m-1}$  and  $B'_{m-1}$  in terms of correlation functions

$$\begin{aligned} \langle B_{m-1} \rangle &= \sum_{k=0}^{m-1} \alpha_k E(k, m - 1 - k) \\ \langle B'_{m-1} \rangle &= \sum_{k=0}^{m-1} \alpha_k E(m - 1 - k, k) \end{aligned} \quad (31)$$

where the  $\alpha_k$ 's are some known coefficients. When  $m - 1 = 3$  for example, we have  $\alpha_1 = 3$ ,  $\alpha_3 = -1$ , and  $\alpha_0 = \alpha_2 = 0$ . As the correlation function only depends on the number of  $X$  and  $P$  measurements, the average values of the four operators of (30) can be easily calculated from  $\langle B_{m-1} \rangle$  and  $\langle B'_{m-1} \rangle$ . Suppose  $B_{m-1}$  has a term proportional to the  $X_1 \dots X_k P_{k+1} \dots P_{m-1}$  operator, which leads to the correlation function  $E(k, m - 1 - k)$ . The operator  $X_m B_{m-1}$  will thus have a term proportional to  $X_m X_1 \dots X_k P_{k+1} \dots P_{m-1}$  leading to the correlation function  $E(k + 1, m - 1 - k)$ , i.e. at the level of

corelation functions we only need to replace  $k$  by  $k+1$  as the  $X$  quadrature is measured at one additional site. A similar argument for the expectation values of  $P_m B_{m-1}$ ,  $X_m B'_{m-1}$  and  $P_m B'_{m-1}$  leads to

$$\mathcal{B}_m = \frac{1}{2} \left| \sum_{k=0}^{m-1} \alpha_k [E(k+1, m-1-k) + E(k, m-k) + E(m-k, k) - E(m-k-1, k+1)] \right| \quad (32)$$

To maximize this expression, we note that for two and three parties the maximum violation is reached for a state with  $V = W = 1$ . We thus make the reasonable hypothesis that it remains true for an arbitrary  $m$ . Recall that we know how to choose  $f$  and  $g$  such as to reach these values. When  $V = W = 1$ , we have

$$E(k, m-k) = \cos \left[ \theta + (m-k) \frac{\pi}{2} \right] \quad (33)$$

and Eq. (31) becomes

$$\begin{aligned} \langle B_{m-1} \rangle &= \sum_{k=0}^{m-1} \alpha_k \cos \left[ \theta + (m-1-k) \frac{\pi}{2} \right] \\ \langle B'_{m-1} \rangle &= \sum_{k=0}^{m-1} \alpha_k \cos \left[ \theta + k \frac{\pi}{2} \right] \end{aligned} \quad (34)$$

Introducing Equation (33) into Eq. (32) and using some well known trigonometric formulae, the Bell factor simplifies to

$$\begin{aligned} \mathcal{B}_m &= \left| \cos \left( \theta + m \frac{\pi}{4} \right) + \sin \left( \theta + m \frac{\pi}{4} \right) \right| \\ &\quad \times \left| \sum_{k=0}^{m-1} \alpha_k \cos \left[ (m-2k) \frac{\pi}{4} \right] \right| \end{aligned} \quad (35)$$

Maximizing the violation of local realism boils down to finding the optimal phase  $\theta_m$  such that the first factor of the right hand side is maximum. This term achieves its maximum of  $\sqrt{2}$  for a value of the phase

$$\theta_m = (1-m) \frac{\pi}{4} \quad (36)$$

We also note that

$$(m-2k) \frac{\pi}{4} = \theta_{m-1} + (m-1-k) \frac{\pi}{2} \quad (37)$$

hence the maximum value of the Bell factor can be finally written as

$$\mathcal{B}_m^{max} = \sqrt{2} \left| \sum_{k=0}^{m-1} \alpha_k \cos \left[ \theta_{m-1} + (m-1-k) \frac{\pi}{2} \right] \right| \quad (38)$$

$$= \sqrt{2} \mathcal{B}_{m-1}^{max} \quad (39)$$

where we have identified the summation of Eq. (38) with Eq. (34) at the optimal angle  $\theta_{m-1}$ . Introducing now the

maximum value obtained in Ref. [5] for the two party case,  $\mathcal{B}_2^{max} = 2\sqrt{2}$ , we obtain by recursion

$$\mathcal{B}_m^{max} = 2^{(m+1)/2} \quad (40)$$

which is the known maximal bound imposed by quantum mechanics. Remarkably, the state  $|\Psi\rangle$  defined in (23) combined with homodyne detection and a binning strategy called *root binning* allows for a maximal violation of the MK inequality. This result shows that even if the binning process discretizing the result of the homodyne detection discards some information, it does not prevent to maximally violate tests of local realism based on discrete variables.

#### IV. EFFECT OF NOISE

In Sections II and III, we proved that the search of loophole-free Bell tests might benefit from an increased number of parties involved in the experiment. The signature of this improvement lies in the exponential increase of the Bell factor with the number of parties  $m$ . However, what makes a Bell test challenging in practice is not the magnitude of the violation, but rather the inevitable noise associated with any real experiment. In many cases, these imperfections are sufficient to hide the non-local correlations one tries to observe. When the number of parties involved in a Bell test increases, so does the fragility of the state used in the experiment. The risk is thus to rescale the violation in such a way that no benefit of a larger  $m$  is witnessed in practice. One can therefore correctly argue that an increased violation of local realism is only significative if accompanied by a comparable improvement of the robustness to noise of the test. After all, Bell tests have to be verified in a lab, not on paper.

In a discrete variable setting, the question of the tolerance to noise of a Bell test is often investigated introducing the noise fraction [17]. The noise fraction quantifies the maximum amount of depolarizing noise one can add to an entangled state and still detect non-local correlations. The depolarizing noise is characterized by the state  $\mathbb{1}/d$ , where  $d$  is the dimension of the Hilbert space. However, in the continuous variable regime, the noise model underlying the noise fraction is irrelevant. Even if we deal with a finite number of photons, such as with the truncated photon number correlated states of Section II, the Hilbert space under consideration remains infinite dimensional. Hence the appropriate bases is the infinite photon number bases and operators proportional to the identity  $\mathbb{1}$  have no physical meaning. To adopt an objective measure of the magnitude of the violation of local realism, we must thus introduce a relevant noise model. In this Section, we will consider a probabilistic erasure: with probability  $p$ , the system of a random party is erased; otherwise the state is untouched. This noise acts independently on each site and transforms an initial

state  $|\Psi\rangle$  into

$$\rho = (1-p)^m |\Psi\rangle\langle\Psi| + p(1-p)^{m-1} \left\{ \sum_{t=1}^m \text{Tr}_t(|\Psi\rangle\langle\Psi| \otimes |0\rangle_t\langle 0|) \right. \quad (41)$$

$$\left. + \dots + p^m |0\rangle_1\langle 0| \otimes \dots \otimes |0\rangle_m\langle 0| \right\} \quad (42)$$

Such a probabilistic erasure is known to appear in, e.g. atmospheric transmissions, and has recently been studied in Refs. [18, 19].

Let us first consider the photon number correlated states of Section II, and concentrate on the second term of Eq. (41). Each element of the sum corresponds to the erasures of one of the subsystems, so suppose for example that the state of party  $m$  has been erased and replaced by vacuum while distributing  $|\Psi\rangle$ . The corresponding state shared between the  $m$  parties reads

$$\begin{aligned} \rho_{1,m} &= \text{Tr}_m(|\Psi\rangle\langle\Psi| \otimes |0\rangle_m\langle 0|) \quad (43) \\ &= \sum_{r=0}^{\infty} |c_r|^2 |r\rangle_1\langle r| \otimes \dots \otimes |r\rangle_{m-1}\langle r| \otimes |0\rangle_m\langle 0| \end{aligned}$$

This state is diagonal in the photon number bases, hence the results of all possible measurements are equiprobable, i.e.,  $\forall \theta_1, \dots, \theta_m$ ,  $P(x(\theta_1), \dots, x(\theta_m)) = cst$ , and all correlation coefficients vanish. This was to be expected from photon correlated states as their entanglement is truly  $m$ -partite; tracing out one subsystem makes the state become separable. Thus, this property also holds for the other noisy terms of (41), so that only the erasure-free term  $|\Psi\rangle\langle\Psi|$  will contribute to the Bell factor. We obtain

$$\mathcal{B}_\rho = (1-p)^m \mathcal{B}_m \quad (44)$$

To illustrate this result, consider the  $m$ -partite GHZ state, Eq. (19). The noisy Bell factor reads  $\mathcal{B}_\rho = (1-p)^m \sqrt{2} (\frac{4}{\pi})^{m/2}$ , hence the maximum probability of erasure  $p_{max}$  such that non-local correlations can be detected is

$$p_{max} = 1 - \frac{\sqrt{\pi}}{2} 2^{1/2m} \quad (45)$$

This value exponentially tends towards  $1 - \sqrt{\pi}/2$  as  $m$  goes to infinity, and we observe the desired increased robustness to noise as  $m$  becomes large.

Finally, consider now the states of Section III. First note that  $\langle f|g\rangle = 0$ , hence in the  $\{|f\rangle, |g\rangle\}$  bases, these states look like GHZ states. We thus expect their robustness to noise to behave like the photon correlated number states. Indeed, going through the calculation, one finds that for every noisy term of (41), and for every choice of measurement setting the probability is an even function of the results, e.g. if party  $m$  loses its mode, the probability  $P(x_1, \dots, x_m)$  to obtain  $x_1, \dots, x_m$  given that  $X_1, \dots, X_m$  is measured is an even function. As a result, none of the noisy terms contribute to the correlation coefficients, and the noisy Bell factor is again given by (44) as expected. As a conclusion, with respect to probabilistic erasure, more parties means more robustness.

## V. A CANDIDATE 3-MODE STATE

Let us now see how the results in Sec. III can be exploited in order to individuate multipartite states such that, on the one hand, they exhibit a significantly high violation of local realism and, on the other hand, they may be generated with near future technology. In particular, we will focus on a class of three-party states whose generation involves four optical ‘‘Schrodinger-cat’’ states, that is four single mode superpositions of coherent states [8].

Before proceeding let us make a remark. The main goal, as said, is now to exploit the gain expected in the amount of violation of locality when the number of involved parties is increased. To this aim, a natural candidate may have been the generalization of the photon-subtracted state discussed in Refs. [6, 7]. Unfortunately, in the case of three parties (and, actually, in the case of any odd number of parties) the generalization of the strategy adopted in Refs. [6, 7] is not effective. This is due to symmetry reasons and the use of the sign binning. Specifically, on the one hand, the joint probability distribution  $P(x(\theta_1), \dots, x(\theta_m))$  of any number of quadratures is an even function under the exchange of the arguments, on the other hand, the sign binning introduces an odd function (for odd number of parties) in the integration that has to be performed in order to obtain any correlation function. As a consequence, all the correlators are zero giving trivially no violation.

Let us now see how the increase in the number of parties involved in a Bell test can be exploited using a different approach, based on the results given in Sec. III. In Ref. [5], the authors propose to use a superposition of Gaussians to implement the functions  $f$  and  $g$  of Eq. (23). In particular, in the case of only two Gaussians they considered the family of states defined by

$$f(x) = \langle x | [c_+ (|\alpha\rangle + |-\alpha\rangle)] \rangle, \quad (46a)$$

$$g(x) = \langle x | [c_- (|\alpha\rangle - |-\alpha\rangle)] \rangle, \quad (46b)$$

where  $c_\pm^2 = 1/[2(1 \pm e^{-2|\alpha|^2})]$ . One can then calculate the corresponding  $V$  and  $W$  coefficients using Eq. (28), which for large amplitudes  $|\alpha| \rightarrow \infty$  gives  $V = 1$  and  $W \simeq 0.64$ . As noticed in Ref. [5], in the case of two parties no violation is possible, i.e.  $\mathcal{B}_2 \simeq 1.90$ . However, as can be seen in Eq. (29), one can achieve a violation of  $\mathcal{B}_3 \simeq 2.23$  already for three parties. The corresponding state reads

$$|\Psi_3\rangle = \frac{1}{\sqrt{2}} [c_-^3 (|\alpha\rangle - |-\alpha\rangle)^{\otimes 3} + c_+^3 (|\alpha\rangle + |-\alpha\rangle)^{\otimes 3}] . \quad (47)$$

where we have put  $\theta = 0$ .

Since the maximum violation is achieved for large amplitudes, we can consider the following simpler state:

$$|\Psi'_3\rangle = c' (|\alpha, \alpha, \alpha\rangle + |\alpha, -\alpha, -\alpha\rangle + |-\alpha, \alpha, -\alpha\rangle + |-\alpha, -\alpha, \alpha\rangle), \quad (48)$$

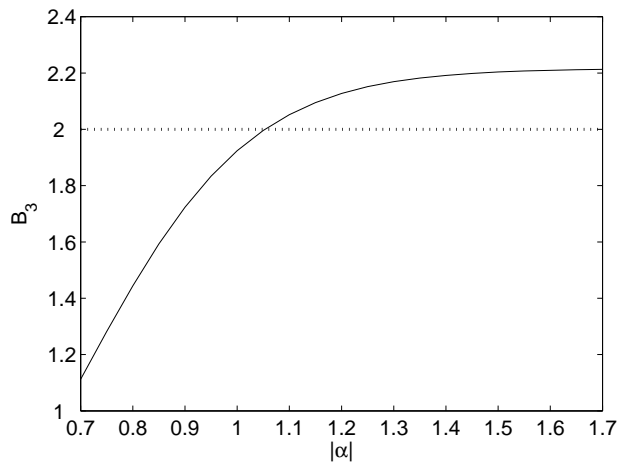


FIG. 3: Bell factor  $\mathcal{B}_3$  for the state  $|\Psi'_3\rangle$  as a function of the amplitude  $\alpha$  [see Eq. (48)].

which coincides with  $|\Psi_3\rangle$  for  $|\alpha| \rightarrow \infty$  [where we defined  $c'^2 = 1/[4(1 + 3e^{-4|\alpha|^2})]$ ]. In order to obtain the Bell factor  $\mathcal{B}_3$  corresponding to such a state, we calculated the probabilities of the binned outcomes using Eq. (46) to define the roots, in combination with Eqs. (24) and (26). Specifically, we considered the domains  $D_x^\pm$  and  $D_p^\pm$  inherited by the state  $|\Psi_3\rangle$ :

$$D_x^+ = \{x \in \mathbb{R} | x \geq 0\} \quad (49a)$$

$$D_x^- = \{x \in \mathbb{R} | x < 0\} \quad (49b)$$

$$D_p^+ = \{p \in \mathbb{R} | -\cos(p\alpha) \sin(p\alpha) \geq 0\} \quad (49c)$$

$$D_p^- = \{p \in \mathbb{R} | -\cos(p\alpha) \sin(p\alpha) < 0\}. \quad (49d)$$

The Bell coefficient  $\mathcal{B}_3$  calculated with such a procedure is shown in Fig. 3. One can see that for amplitudes as small as  $|\alpha| \simeq 1.1$ , the state  $|\Psi'_3\rangle$  already gives values above the local bound. We note that in this regime of small amplitudes,  $|\Psi'_3\rangle \neq |\Psi_3\rangle$  and the domains defined in Eqs. (49) might be non-optimal. As  $\alpha$  is increased, a violation around 10% of the MK inequality is rapidly achieved.

Now let us describe how the state  $|\Psi'_3\rangle$  may be conditionally generated by using linear optics and superpositions of coherent states (SCS) of this form:

$$|\text{SCS}\rangle = c_+(|\alpha\rangle + |-\alpha\rangle). \quad (50)$$

Consider the scheme depicted in Fig. 4. Two copies of the state  $|\text{SCS}\rangle$  in mode  $a_0$  and  $a_1$  are mixed in a balanced beam splitter. The same action is performed on modes  $a_2$  and  $a_3$ . Then modes  $a'_1$  and  $a'_2$ , as well as  $a'_0$  and  $a'_3$  are respectively mixed by means of two other beam splitters. As a last step mode  $a''_0$  is measured via a homodyne detector. It is straightforward to show that, when the measurement outcome  $-\alpha$  is obtained, then the conditional state of the remaining modes coincides approximately with  $|\Psi'_3\rangle$ .

The main issue in implementing the scheme above concerns the generation of the four states  $|\text{SCS}\rangle$ , whose

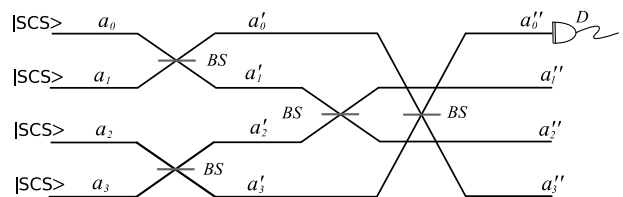


FIG. 4: Schematic of a possible way to conditionally generate the state  $|\Psi'_3\rangle$  in Eq. (48): ( $|\text{SCS}\rangle$ ) superposition of coherent states [see Eq. (50)]; (BS) balanced beam splitter; (D) homodyne detector.

preparation is experimentally demanding. However, their generation in traveling light modes has been recently reported by several groups [8]. Thus, one may envisage that, in the near future, the implementation of the whole scheme in Fig. 4 should be possible.

## VI. CONCLUSIONS

In this paper, we investigated the violation of local realism in Bell tests based on homodyne measurements performed on multipartite continuous variable states. We have proven that the Mermin-Klyshko inequality can be violated by an amount which grows exponentially with the number of parties. Furthermore, we even show that it is possible to attain the maximal violation allowed by quantum mechanics by tuning the state and the binning strategy appropriately. The benefit of this multipartite approach is shown to be effective in practice by analysing the increase of the robustness to noise of the tests with the number of modes.

The theoretical interest of our results resides in the fact that we are not considering a direct mapping from continuous to discrete variables. Such a procedure would in fact force the measurement to be used in the locality test, as the analysis in Ref. [15] shows. We instead consider homodyne measurement because of their extremely high detection efficiency. In this case, the possibility to obtain a maximal violation of Mermin-Klyshko inequality is non-trivial, since (i) they represent a small subset of all possible measurements and (ii) the binning procedure may cause an irreversible loss of information. As we have shown, such a loss is not crucial if suitable binning procedures are used, properly adapted to the states under investigation.

From an experimental perspective, our findings show that one can effectively benefit from the increase in the violation of locality in the considered multipartite continuous variable scenario. In general, this allows for a greater freedom in the search of feasible multipartite states that can be used to test nonlocality in an actual experiment, namely suffering noise degradation. As an instance, inspired by the analysis of the states that maximally violate the local bound, we have proposed an approximation of the latter which may be experimentally realized in the



near future. Such states involve three parties and give a violation of around 10% of the local bound. Other states of light, with similarly high violation, may possibly be envisaged, inspired by these results and suitably adapted to experimental constraints.

## VII. ACKNOWLEDGEMENTS

We gratefully acknowledge the financial support from the EU Projects QAP and COMPAS. A. A. and A. F. ac-

knowledge the Spanish MEC projects FIS2007-60182 and Consolider Ingenio 2010 QOIT, and the Juan de la Cierva grant. N.J. C. and J. N. acknowledge financial support from the IUAP programme of the Belgian government under project Photonics@be. J. N. also acknowledges support from the Belgian FRIA foundation.

- 
- [1] A. Einstein, B. Podolsky, and N. Rosen, *Phys. Rev.* **47**, 777 (1935).
  - [2] J.S. Bell, *Physics* (Long Island City, N.Y.) **1**, 195 (1964).
  - [3] A. Aspect, P. Grangier, and G. Roger, *Phys. Rev. Lett.* **47**, 460 (1981).
  - [4] W.J. Munro, *Phys. Rev. A* **59**, 4197 (1999).
  - [5] J. Wenger *et al.*, *Phys. Rev. A* **67**, 012105 (2003).
  - [6] R. García-Patrón Sánchez *et al.*, *Phys. Rev. Lett.* **93**, 130409 (2004); R. García-Patrón, J. Fiurasek and N. J. Cerf, *Phys. Rev. A* **71**, 022105 (2005).
  - [7] H. Nha, and H. J. Carmichael, *Phys. Rev. Lett.* **93**, 020401 (2004);
  - [8] A. Ourjoumtsev *et al.*, *Science* **312**, 83 (2006); J.S. Neergaard-Nielsen *et al.*, *Phys. Rev. Lett.* **97**, 083604 (2006); K. Wakui *et al.*, *Opt. Express* **15**, 3568 (2007); A. Ourjoumtsev *et al.*, *Nature* **448**, 784 (2007);
  - [9] V. Parigi *et al.*, *Science* **317**, 1890 (2006); A. Zavatta, S. Viciani, M. Bellini, *Science* **306**, 660 (2004).
  - [10] J.F. Clauser, M.A. Horne, A. Shimony and R.A. Holt, *Phys. Rev. Lett.* **23**, 880 (1969).
  - [11] N.D. Mermin, *Phys. Rev. Lett.* **65**, 1838 (1990); D.N. Klyshko, *Phys. Lett. A* **172**, 399 (1993).
  - [12] N. Gisin and H. Bechmann-Pasquinucci, *Phys. Lett. A* **246**, 1 (1998).
  - [13] P. van Loock and S.L. Braunstein, *Phys. Rev. A* **63**, 0222106 (2001).
  - [14] A. Ferraro and M.G.A. Paris, *J. Opt. B* **7**, 174 (2005).
  - [15] Z.B. Chen, J.W. Pan, G. Hou, and Y.D. Zhang, *Phys. Rev. Lett.* **88**, 040406 (2002).
  - [16] E.G. Cavalcanti *et al.*, *Phys. Rev. Lett.* **99**, 210405 (2007).
  - [17] D. Kraszkowski, P. Gnacinski, M. Zukowski, W. Miklaszewski and A. Zeilinger, *Phys. Rev. Lett.* **85**, 4418 (2000).
  - [18] C. Wittmann, D. Elser, U.L. Andersen, R. Filip, P. Marek and G. Leuchs, *quant-ph/07041918* (2007)
  - [19] J. Niset, U.L. Andersen and N.J. Cerf, *arXiv:0710.4858* (2007)